

METAL PA DOOR PRODUCT SPECIFICATION

All materials are from New Zealand manufacturers and suppliers.


STANDARD DOOR SIZES

Any size other than the below are specials. $2050 \, \text{mm} \, \text{H} \, \times \, 880 \, \text{mm} \, \text{W}$

STANDARD COLOURS

Any colour other than the below are specials.



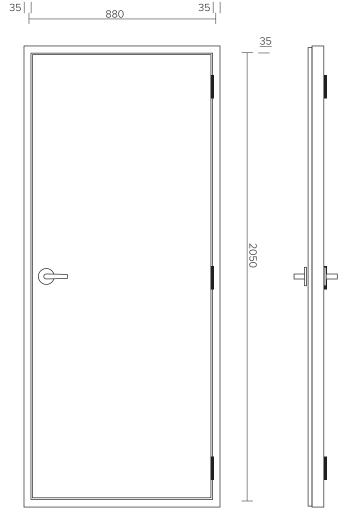

Aperture size to suit door = 2060mm H x 890mm W

|71 |

DOOR PANEL

ZINCALUME

35mm Sandwich panel consisting of two Endura 0.59/G300 steel skins.

Laminated to a Flame retardant EPS core, compliant with AS1366. External colour from the colour range ,internal colour is matching Endura grey backer.

FRAME

Proprietary aluminium extrusions 6060-T5 alloy. Powdercoated to match. Heavy duty wall thickness at hinge location. Rubber weather seal. LH or RH (reversible) open out.

Corner gussets for mitre reinforcing.

HINGES

Heavy duty stainless steel, 3 per door 100x100 mm leaf.

LOCK

Commercial grade Legge G2 series entry lock ,satin chrome lever action

PACKAGING

Timber crate and cardboard protection.